




BULB-OUT DETAIL 1

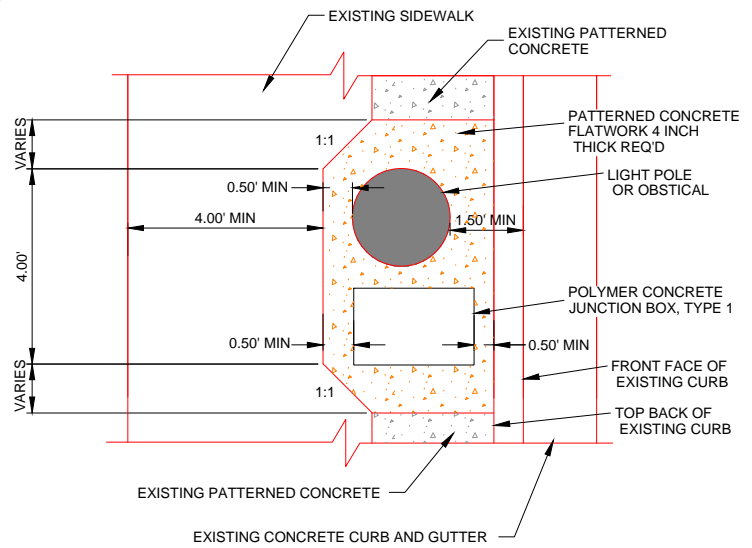

BULB-OUT DETAIL 2

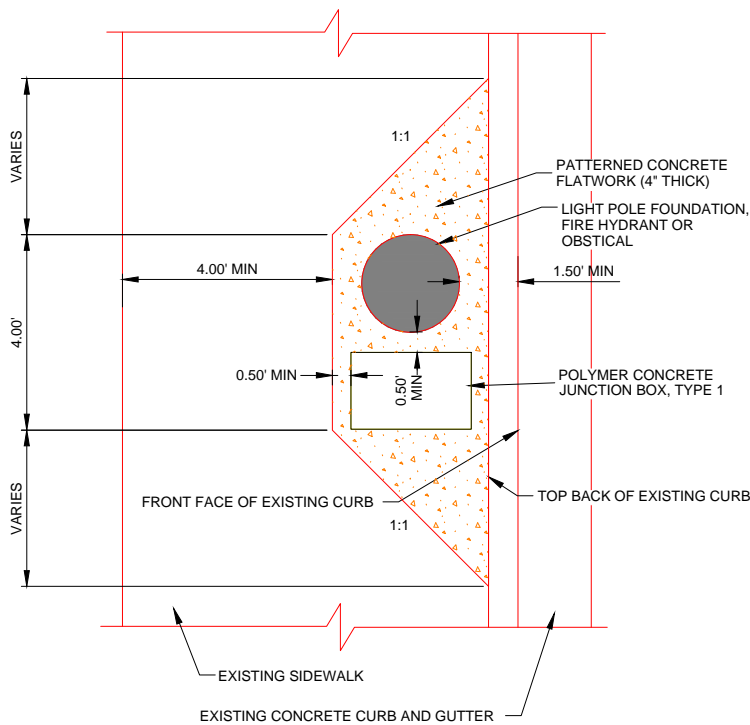


BULB-OUT DETAIL 3

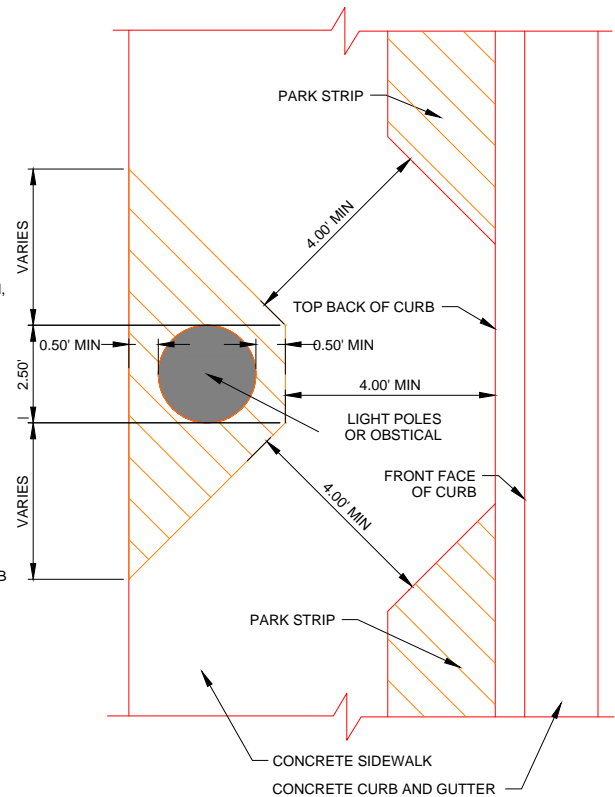

BULB-OUT DETAIL 4
LIGHT POLE AT BACK OF WALK

NOTES:

1. THE COLOR AND PATTERN WILL BE DETERMINED BY THE ENGINEER, TEN FOOT MINIMUM TEST PANEL TO BE APPROVED BY SANDY CITY ENGINEER (INCIDENTAL TO WORK) PRIOR TO INSTALLATION. COLOR SHALL BE INTEGRAL TO THE CONCRETE. SEE SPECIFICATIONS FOR ADDITIONAL DETAILS. THE FINAL MIX DESIGN SHALL BE GIVEN TO THE INSPECTOR.
2. CLEAR COAT SEALANT (2 COATS) TO BE APPLIED OVER FINISHED PATTERNED CONCRETE FLATWORK.
3. MINIMUM OFFSET OF 6" NEW PATTERNED CONCRETE FLATWORK AROUND ALL JUNCTION BOXES, FOUNDATIONS OR OBSTICALS.

	MG	CREATED	1/5/15	
NO.	AUTHORIZED BY	REVISIONS	DATE	

STANDARD DETAIL
CG-03
PATTERNED CONCRETE BULB-OUTS